


# RxCloud Mini LED High Bay



50W / 6250lm"  
RxHB01-50W

## Optical Data

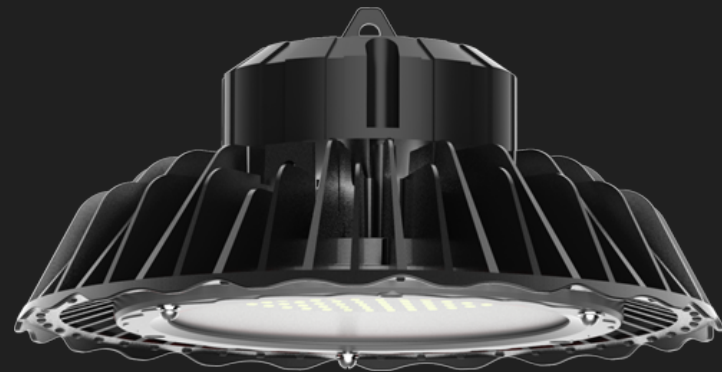

LED Type	Nichia SMD from Japan
LED QTY	56pcs
System Efficacy	125 lm/W (CCT=5000K)
Luminous Flux	6,250 lm (CCT=5000K)
CCT	3000K, 4000K , 5000K
Beam Angle	90° ,120°( H19601, H25201)
CRI	>Ra80
System Efficiency	>90%

## Electrical Data



Power Supply	Meanwell
Input Voltage	AC100~ 277V
Power Frequency	47~63Hz
Output Voltage	DC28.8~48V
Output Current	1.05A (Constant Current)
Power Efficiency	>93%
Power Factor	>0.93
Total Harmonic Distortion	<15%

## Other parameters

System Power Consumption	50±3W
LED Power Consumption	47±3W
Fixture Material	Aluminum Alloy
Ingress Protection	IP65
Luminaire Net Weight	2.27±0.3kg
Life Span	>50000Hrs(Ta=30°@L70)

Junction Temperature(Tj)	<75°(Ta=30°)
Storage Temperature	-40~+70°
Operating Temperature	-30~+50°
Operating Humidity	15~90%RH
Outlook Dimensions	264 × 264 × 121.5mm
Export Carton Size	310×310×235mm

## Optional Info

Installation Method	Loop Hanging / Wall Mounting
Fixture Color	Black / White
Intelligent Control	Non-dimmable

